


Insulated Extra Flexible Round Grounding/Power Cables

Tight bends, compact spaces, repetitive motion and high power requirements are among the key cabling obstacles that can short circuit new product designs – driving up costs and lengthening development timetables. Now there is a unique cable system that can help you overcome these and other design challenges – PowerFlex™ from Cableco.

Unlike standard cable, PowerFlex is comprised of high strand-count tinned copper wires. This high strand-count construction gives PowerFlex its remarkable flexibility. This construction also significantly increases cable life and allows PowerFlex to carry more current than same gauge conventional cable.

PowerFlex is rated to 105°C, 300 Volt and is approved to UL 10236. Your Cableco Sales Representative can provide you with complete information on how the PowerFlex cable system can simplify system power distribution for your specific application.

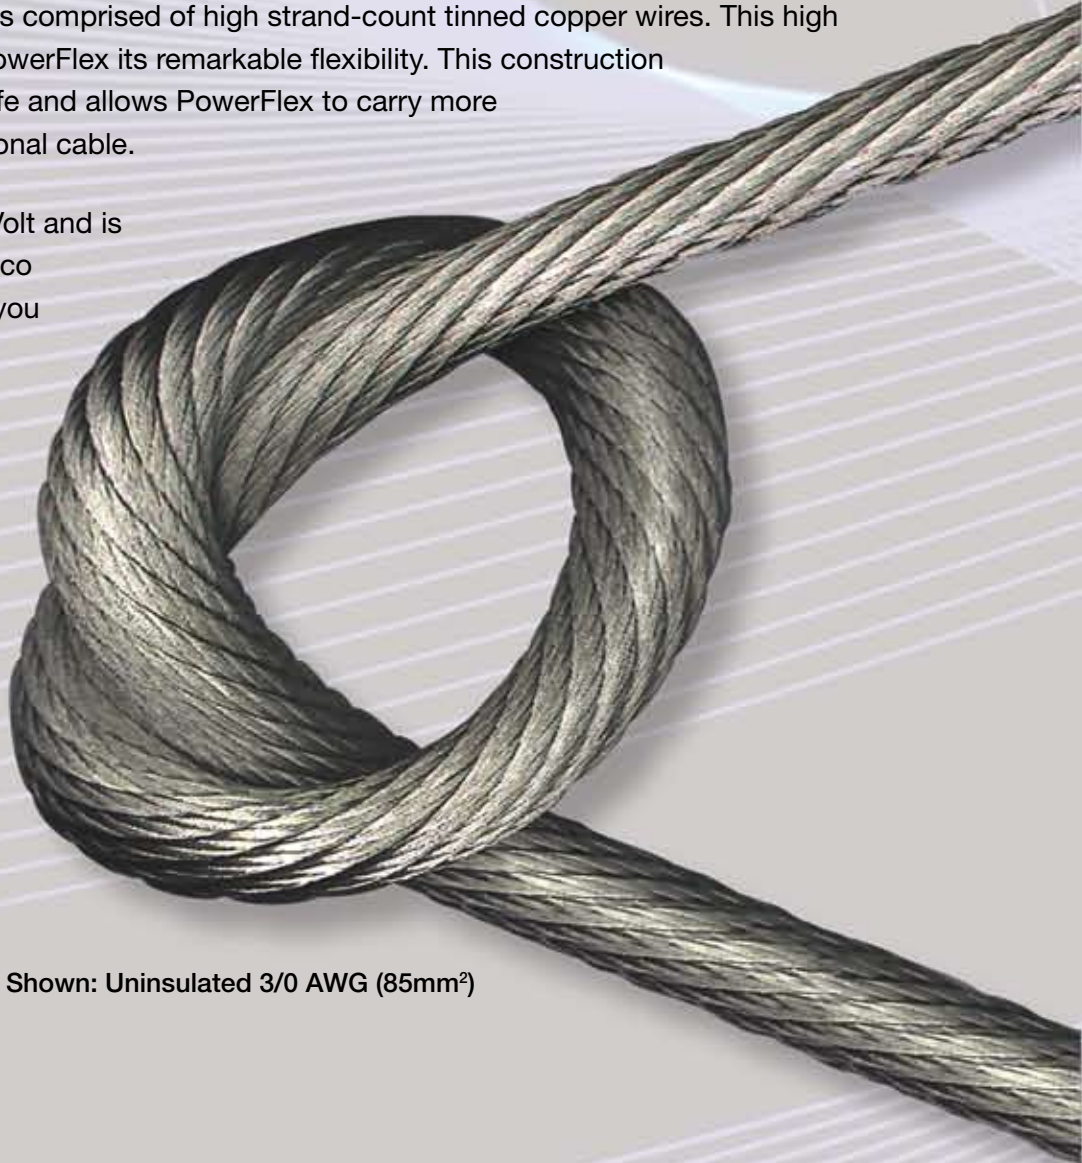

Cable Shown: Uninsulated 3/0 AWG (85mm²)

www.cablecotech.com

✓ *RoHS Compliant*



PowerFlex™ can be easily terminated with Cableco's high quality, low voltage-drop FusionLug™. The FusionLug is fabricated from the strands of the wire itself. Our unique process "fuses" wire strands with copper, creating a high quality, low voltage-drop termination. It can be cut, bent, drilled or chamfered to meet specific application requirements.

PART NUMBER	CABLE SIZE (AWG)	CABLE SIZE (MM ²)	NOMINAL CURRENT CARRYING CAPACITY (AMPS)	STRAND CONSTRUCTION	NUMBER OF STRANDS	CIRCULAR MIL AREA	NOMINAL WALL THICKNESS INCHES (MM)	NOMINAL O.D. INCHES (MM)	NOMINAL WEIGHT PER FOOT LBS (KG/M)	APPROXIMATE BEND RADIUS INCHES (MM)	RESISTANCE OHMS PER 1000 FT. (MILLI OHMS/M)
EF18-12-C	18	0.82	12A	7 x 9/36	63	1,575	0.015" (0.38)	0.084" (2.1)	0.005 (0.007)	0.25" (6.4)	6.570 (21.5)
EF16-16-C	16	1.30	16A	7 x 15/36	105	2,625	0.015" (0.38)	0.099" (2.5)	0.008 (0.012)	0.30" (7.6)	4.140 (13.6)
EF14-20-C	14	2.10	20A	7 x 24/36	168	4,200	0.020" (0.51)	0.129" (3.3)	0.013 (0.019)	0.39" (9.9)	2.600 (8.53)
EF12-25-C	12	3.30	25A	7 x 37/36	259	6,475	0.020" (0.51)	0.149" (3.8)	0.021 (0.031)	0.45" (11.4)	1.640 (5.38)
EF10-40-C	10	5.30	40A	7 x 59/36	413	10,325	0.020" (0.51)	0.177" (4.5)	0.032 (0.048)	0.53" (13.5)	1.040 (3.41)
EF8-55-C	8	8.40	55A	7 x 95/36	665	16,625	0.045" (1.1)	0.251" (6.4)	0.053 (0.079)	0.75" (19.1)	0.640 (2.10)
EF6-85-C	6	13.30	85A	7 x 150/36	1,050	26,250	0.060" (1.5)	0.323" (8.2)	0.087 (0.130)	0.97" (24.6)	0.400 (1.31)
EF4-105-C	4	21.20	105A	7 x 7 x 34/36	1,666	41,650	0.060" (1.5)	0.409" (10.4)	0.133 (0.198)	1.23" (31.2)	0.260 (0.85)
EF2-140-C	2	33.60	140A	7 x 7 x 54/36	2,646	66,150	0.060" (1.5)	0.481" (12.2)	0.211 (0.314)	1.44" (36.6)	0.160 (0.52)
EF1/0-205-C	1/0	53.50	205A	7 x 7 x 86/36	4,214	105,350	0.070" (1.8)	0.615" (15.6)	0.338 (0.504)	1.85" (47.0)	0.100 (0.33)
EF2/0-225-C	2/0	67.40	225A	7 x 7 x 108/36	5,292	132,300	0.080" (2.0)	0.662" (16.8)	0.428 (0.638)	1.99" (50.5)	0.090 (0.30)
EF3/0-260-C	3/0	85.03	260A	7 x 7 x 137/36	6,713	167,800	0.080" (2.0)	0.764" (19.4)	0.546 (0.814)	2.29" (58.2)	0.075 (0.25)
EF4/0-300-C	4/0	107.00	300A	19 x 7 x 64/36	8,512	212,800	0.080" (2.0)	0.814" (20.7)	0.752 (1.12)	2.44" (62.0)	0.059 (0.19)

C Denotes color: 0 - Black 1 - Brown 2 - Red 3 - Orange 4 - Yellow 5 - Green 6 - Blue 7 - Violet 8 - Gray 9 - White

*See separate data sheet for product information.

✓RoHS Compliant

North and South America

Cableco Technologies
1750 Junction Avenue
San Jose, CA 95112
Phone: 408-453-9500
Fax: 408-943-6655
Email: sales@cablecotech.com
Web: www.cablecotech.com

Europe

Methode Electronics Ireland, Ltd.
Unit H, Crossagalla Business Park
Ballysimon Rd. • Limerick, Ireland
Phone: +353 (0) 61 401222
Fax: +353 (0) 61 401942
Email: info@methode.com

Far East

Methode Electronics Far East, Pte. Ltd.
60 Alexandra Terrace, #02-09A, The Comtech
Singapore 118502
Phone: (65) 6861 5444
Fax: (65) 6861 4777
Email: info@methode.com